

Ricoh Interactive Whiteboard

A6500
A7500
A8600

- ☑ Interactive learning
- ☑ Remote collaboration
- ☑ Webinars
- ☑ Hybrid meetings

RICOH
imagine. change.



When you need to work together - don't let distance come between you


Hybrid working and learning has become a daily process for many people. Nowadays, people join meetings and training from multiple locations as standard and the need to collaborate remotely has never been greater.

Make meetings and classes collaborative wherever they are, with the new Ricoh Interactive Whiteboards.

The new IWB A Series is designed to make collaboration work for you.

Key features

- Android embedded built-in
- Expandable with Optional Windows controller
- A set of pre-installed applications
- Simple connectivity
- Wired & wireless content sharing

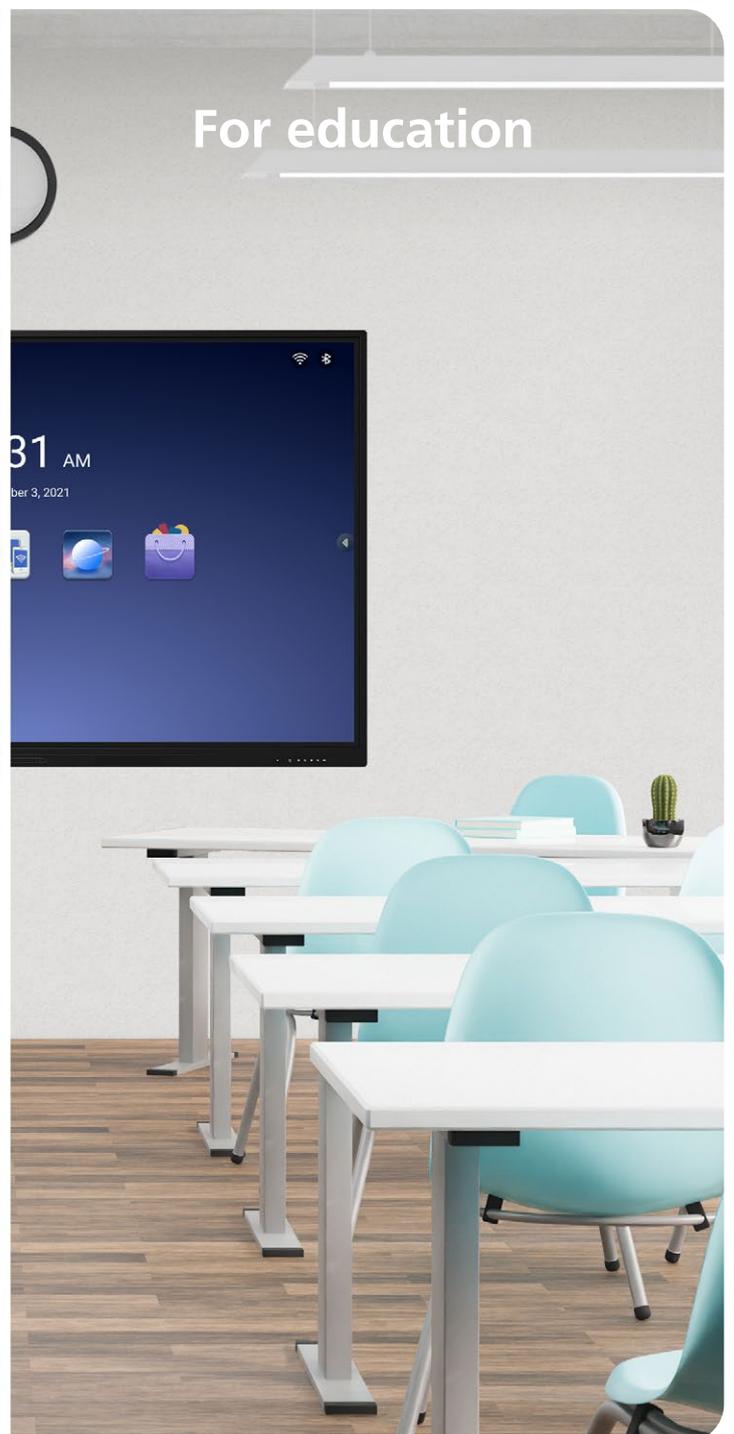



Designed for business

With its easy-to-use interface and built-in Apps, the new whiteboards offer seamless communication and collaboration. Ideal for hybrid working, allowing multiple people to write on the same screen.

Save time taking minutes and notes, you can capture annotations in real-time. Cast multiple screens wirelessly at any time and maximise collaboration.

Built for education

With remote learning and collaboration the new normal, hybrid classrooms must allow real-time participation and information sharing with inperson and remote attendees allowing external sources into the classroom.

Our interactive whiteboards are affordable, intuitive and customizable. Teachers can now simply plug in a laptop to start a lesson.



Optimised for business and education

Whether you're presenting the next big business idea, or trying to capture the imagination of a classroom of students, Ricoh Interactive

Whiteboards are designed with a feature-rich suite of tools built-in to give you the ultimate in collaboration boards.

Effective split-screen presentation

Using two screens is a standard most expect in work and presentations. Run two different apps or images side by side with the interactive whiteboard and get more from your meetings and classes.




Powerful audio, slim design

Communication that's loud and clear with high-definition audio. Designed with optimally placed 15w speakers for pitch-perfect presentations. Subtle and stylish, its slim design complements every workspace, at home, office, school or studio.



4K UHD display embedded canvas

So much more than a whiteboard. It's a blank canvas for your next big ideas. With a sharp 4K (3,840 x 2,160) screen for presenting detailed images. Fitted with anti-glare film, your team can work comfortably for longer. So, nothing stops your creative flow.

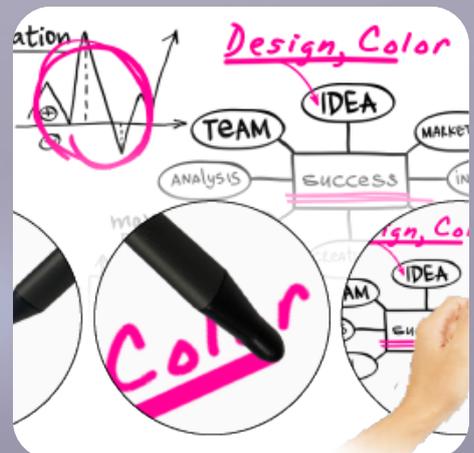

Simple connectivity and usability

It's easy to sync your device to the screen, simply choose how you connect – HDMI, USB or USB Type-C. Save precious time and cast your PC screen quickly and simply.

Connect your device and watch it instantly appear on the whiteboard via automatic video signal.


Useful picture-in-picture function

A picture can speak a thousand words – so add an image to your whiteboard with the picture-in-picture function. This could be data, charts or stock shots that help get your point across.



Auto input detection

Save precious time and cast your PC screen quickly and simply. Connect your device and watch it instantly appear on the whiteboard via automatic video signal.

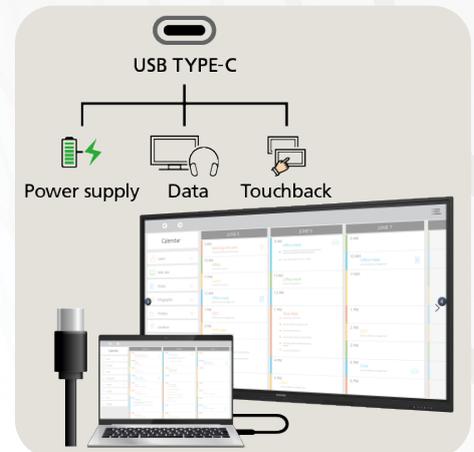

Front-facing ports for multi-interfaces

Choose how you connect – HDMI, USB or USB Type-C, it's easy to sync your device to the screen. Practical for everyday use, you'll find operative buttons mounted on the front of the screen.



Collaboration at your fingertips

Time-saving screen

The interactive whiteboard is more than a screen, it's an assistant. With built-in calendar and stop watch functionality, you can maximise your meeting time and record each session to as standard.



Share your screen

The Ricoh Interactive Whiteboard is compatible with all operating systems. Maximise the efficiency of your meetings, classes and creative sessions, display screens at the same time.



Expandable for business use

Ricoh Creative Collaboration for IWB lets you participate, wirelessly, in multiple video conferences in a single click. So, you can share content without needing additional apps or hardware.



Plug and Play Android Apps

Embedded with Android OS, you can use all your favourite apps. Many apps are preloaded and ready for use to save you time, such as the whiteboard and wireless presentation apps.



Powerful collaboration for business and education



For business



For education

- Real-time information sharing
- Faster team-based decision making
- Easy collaboration with remote team members
- Increased comprehension of complex topics
- Improved visual communications

- Brings multi-media and Internet content into the classroom
- Interactivity increases student participation
- Supports distance learning initiatives
- Connects to mobile devices
- Multi-touch for group activities

RICOH
imagine. change.

www.ricoh.com.ph

RICOH (PHILIPPINES), INC.

G/F OPPEN Building, 349 Sen Gil J. Puyat, Makati City, Philippines 1200
Hotline: [Makati] (02) 8865-9500, [Laguna] (049) 502-7243, [Cebu] (032) 256-4559

 Ricoh Philippines
 Ricoh Philippines

 ricohphils
 Ricoh Philippines

Ricoh Interactive Whiteboard

A6500 Datasheet

- ✓ Interactive learning
- ✓ Remote collaboration
- ✓ Webinars
- ✓ Hybrid meetings



Everything you need to work together – without distance limitations


Hybrid working and learning has become a daily process for many people. Nowadays, people join meetings and training from multiple locations as standard and the need to collaborate remotely has never been greater. Make meetings and classes collaborative wherever they are, with the new Ricoh Interactive Whiteboards. The new A6500 is designed to make collaboration work for you.

In education remote learning and collaboration are the new normal, where hybrid classrooms must allow real-time participation and information sharing with in-person and remote attendees allowing external sources into the classroom. Our interactive whiteboards are affordable, intuitive and customizable. Teachers can now simply plug in a laptop to start lessons.

Businesses reap benefits from the easy-to-use interface and built-in Apps, that offer seamless communication and collaboration. Ideal for hybrid working, allowing multiple people to write on the same screen. Save time taking minutes and notes, you can capture annotations in real-time. Cast multiple screens wirelessly at any time and maximise collaboration.

- 65 inch: for small conference rooms and classrooms
- Easy-to-use interface and built-in Apps
- Effective split-screen presentation
- 4K UHD display embedded canvas
- Advanced connectivity

Dimensional drawings

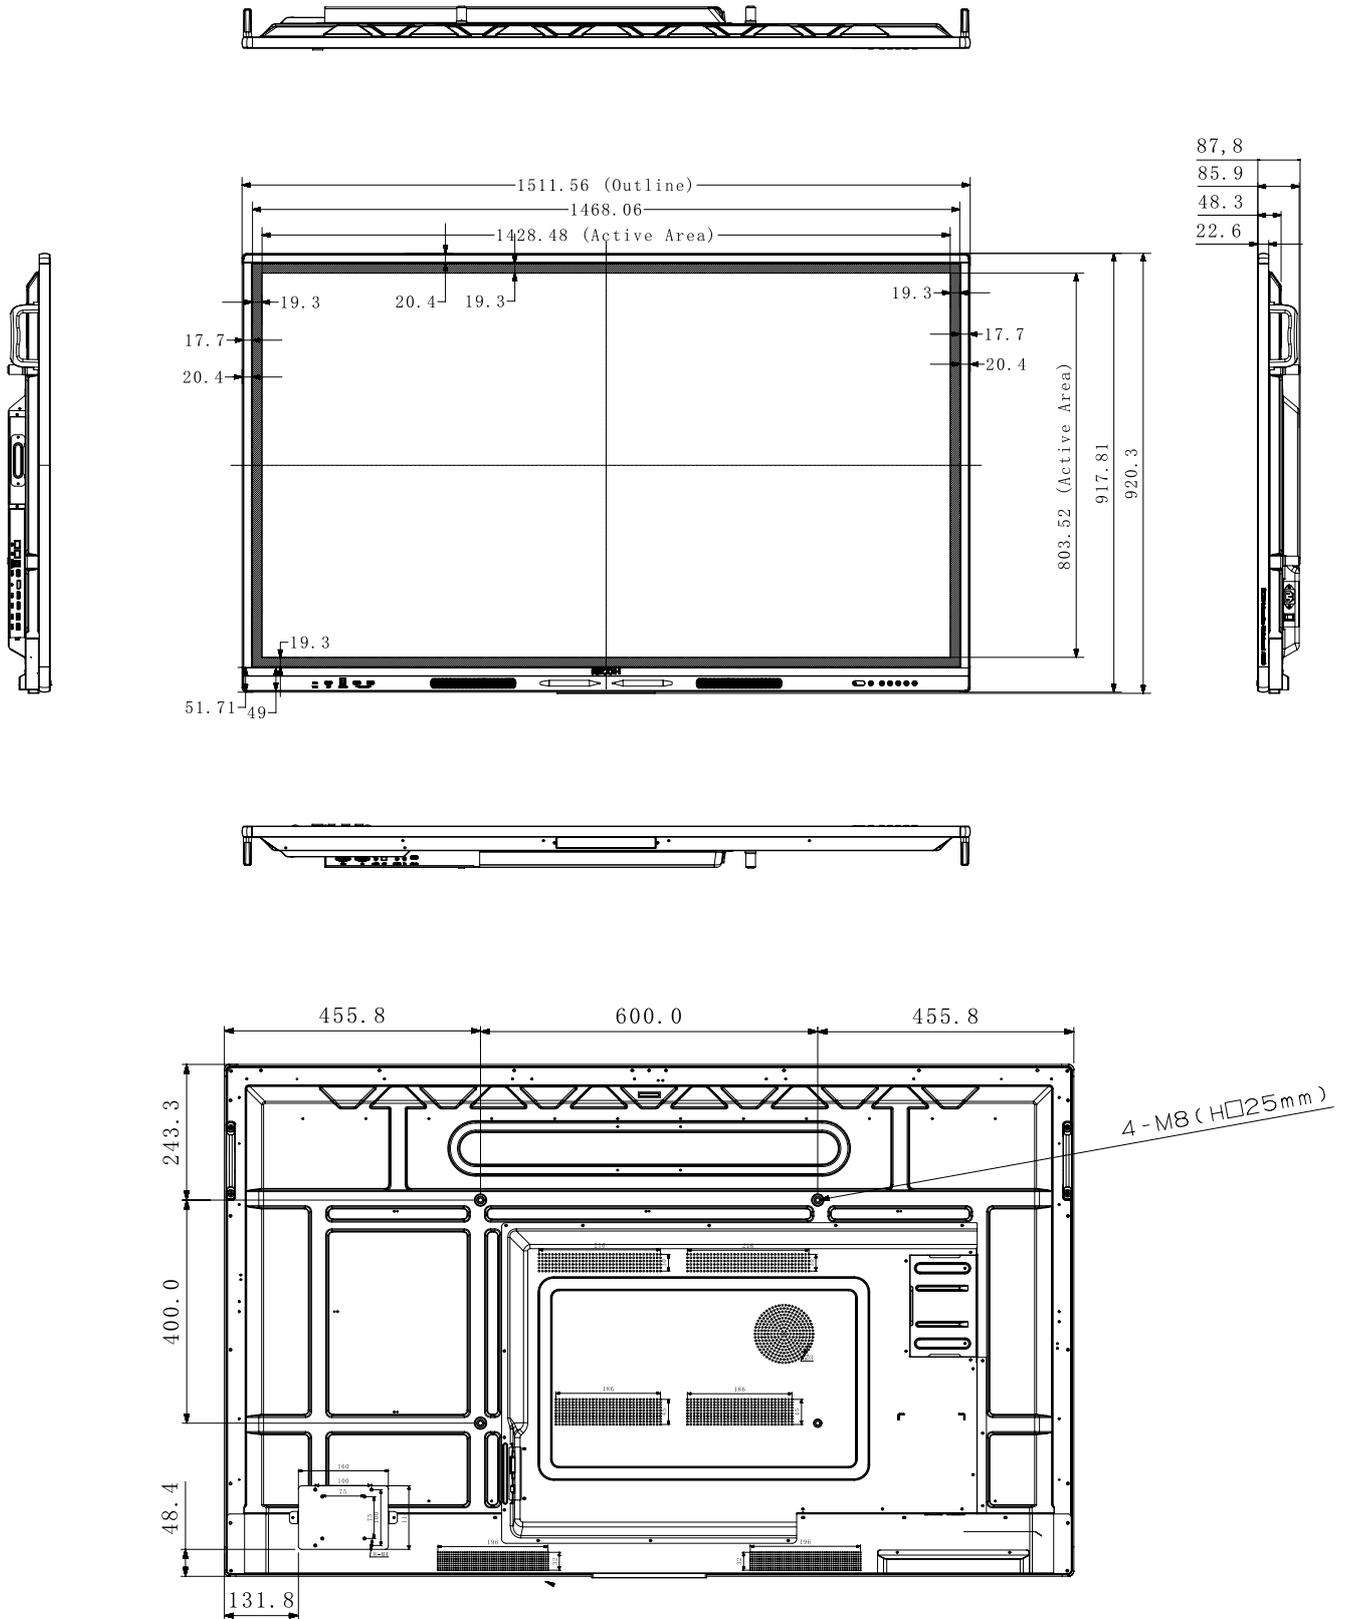

A6500

MAIN SPECIFICATIONS

GENERAL

Rear interface

HDMI IN x2	Version: HDMI2.0, Up to 3840x2160@60Hz, HDMI1 support ARC function, HDCP 1.4/2.0/2.2 compliant
DP IN x1	Version: DP1.2a, Up to 3840x2160@60Hz, HDCP 1.4/2.2 compliant
VGA IN x1	Interface: DB15, Up to 1920x1080@60Hz
Audio IN x1	Interface: Φ 3.5mm mini interface, input level (L/R): 0.2-2Vrms
LAN x2	10M/1000Mbps Base-T, 100Mbps Base-TX, Support internet switch, To OPS (10M/100M/1000M), To Android (10M/100M) Interface: RJ-45
USB2.0 x1	Support images, music, video file playback, only can use this USB port to upgrade Interface: USB2.0 Type-A
USB3.0 x2	Support images, music, video file playback. Upgrade are not supported Interface: USB3.0 Type-A
Touch-USB x1	Touch interface for HDMI1/HDMI2/DP/VGA Interface: USB3.0 Type-B
MIC IN x1	Can Mix the MIC input and other input source to SPK OUT Interface: Φ 3.5mm mini interface
SPDIF x1	Max speed: 16Mbps Interface: Optical
RS232-IN x1	RS232 Input Interface: DB9
HDMI-OUT x1	Max. resolution: 3840x2160@60Hz Version: HDMI2.0, All signals can be Loop-outed by HDMI-OUT
Audio OUT x1	Output level (L/R): 10mVrms \pm 40mVrms (@500mVrms 1KHz, load 32 Ω) Interface: Φ 3.5mm mini interface (Headphone-out)

Front interface

Type-C x1	Power output: 20V/3A, Up to 3840x2160@60Hz Interface: Type-C
Public USB x2	Version: USB3.0 Interface: Type-A
Touch-USB x1	Touch interface for HDMI Interface: USB3.0 Type-B
HDMI IN x1	Version: HDMI2.0, Up to 3840x2160@60Hz, HDCP 1.4/2.0/2.2 compliant
Dimensions: W x D x H (mm)	1,512 x 88 x 921
Package size: W x D x H (mm)	1,660 x 220 x 1,010
Weight (kg)	39
Package weight (kg)	54
Housing material (face frame/back shell)	Aluminium/metal plate
Housing colour (face frame/back shell)	Black/black
VESA	4-M8 screw hole 600 x 400 mm

DISPLAY PANEL

Panel size: diagonal (" wide)	65
Effective area: W x H (mm)	1,428.48 x 803.52
Resolution: maximum (Full HD)	3,840 x 2,160
Colours: maximum	1,070,000,000
Brightness: maximum (cd/m ²)	350
Contrast ratio	1,200 : 1
Pixel pitch (mm)	0.372 x 0.372
Response Time (ms)	8
Refreshing frequency	60 Hz
Viewing angle: HV (°)	178/178
LED lifetime	50,000 hours
Colour gamut	72%

TOUCH SYSTEM

Sensing type	Infrared touch frame
Surface protection	3.2 mm toughened glass
Infrared touch	Up to 20 points
Interpolation resolution	32,768 x 32,768
Theory clicks	Unlimited
Connect type	USB2.0 Full Speed
Voltage	DC+5V +/- 5 %
Windows 10/8, Android	Multiple touch supported
Linux, Mac OS X, Chrome	Single touch supported

ELECTRICAL

OS	Android 9.0
Power requirements	AC 100V - 240V, 50/60Hz
Power consumption without OPS	Maximum brightness: 300 W 50% brightness: 180 W
Standby condition without OPS	< 0.5 W
Audio output power	2x15 W / 8 Ω
OPS power	DC 18V / 5A
RAM	4 GB
ROM (storage)	32 GB

SOFTWARE

Pre-installed app	Whiteboard, Browser, File manager, Screen share, Office document view (incl. PDF), Media Player, Cloud storage, Android app store
Default functions	Welcome screen (Launcher), Setting, Source setting, Annotation tool, Stopwatch, Clock, Calculator, Eye-protection, Spotlight, Screen capture, Calendar, Vote, Screen Recorder, Split Screen, Picture in Picture

A6500

MAIN SPECIFICATIONS

WIFI

Operating frequency	2.4 GHz / 5 Ghz
Wi-Fi standard	802.11a/b/g/n/ac

ECOLOGY

Operating temperature	0 ~ 32°C
Operating humidity	20 ~ 80%
Maximum daily operation hours (exclude stand-by time)	18 hours / day (24 hours) Maximum daily operating hours are 18hrs/day. Do not use the machine continuously / intermittently for more than 18 hours per day. Failure to do so could result in malfunction.
Storage temperature	-10 ~ 50°C
Storage humidity	15% ~ 80% RH Non-Condensing

ACCESSORIES

- Touch pen x2
- Read this first sheet
- Quick guide sheet
- Batteries AAAx2
- Remote control
- Power cord
- USB type C cable (2m)
- HDMI 2.0 cable (3m)
- USB A-B 2.0 cable (3m)
- Plastic clamp (2pcs)

OPTIONAL OPS SPECIFICATIONS

Main spec (OPS)	Chipset: SOC LAN interface (Wired): 10BASE-T/ 100BASE-TX/ 1000BASE-T LAN interface (Wireless): 802.11 ac/a/b/g/n/ax Network authentication (Wireless LAN): According to setting on system OS Encryption (Wireless LAN): According to setting on system OS Interface (Output): HDMI Interface (others): USB 3.0 Type A x 2, USB 2.0 Type A x 2, USB Type C x 1, 3.5 mm microphone jack, 3.5 mm headphone jack Bluetooth: embedded Power Source: DC +12 to 19V Not included
Capture box	Not included
Installation	Insert into OPS slot
Product size: W x D x H (mm)	200 x 119 x 30
Product weight (kg)	1
Environmental condition	Operating temperature limits: -10 ~ 32°C Operating humidity limits: 20 ~ 80% Storage temperature limits: -10 ~ 50°C Storage humidity limits: 15 ~ 80%

RICOH
imagine. change.

www.ricoh.com.ph

RICOH (PHILIPPINES), INC.

G/F OPPEN Building, 349 Sen Gil J. Puyat, Makati City, Philippines 1200
Hotline: [Makati] (02) 8865-9500, [Laguna] (049) 502-7243, [Cebu] (032) 256-4559



Ricoh Interactive Whiteboard

A7500 Datasheet

- ✓ Interactive learning
- ✓ Remote collaboration
- ✓ Webinars
- ✓ Hybrid meetings




Collaborative meetings and classes – anywhere, any time

Whether you're presenting the next big business idea, or trying to capture the imagination of a classroom of students, Ricoh Interactive Whiteboards are designed with a feature-rich suite of tools built-in to give you the ultimate in collaboration boards. With its easy-to-use interface and built-in Apps, the new A7500 offers seamless communication: ideal for hybrid working and classrooms at the same time.



In education remote learning and collaboration are the new normal, where hybrid classrooms must allow real-time participation and information sharing with in-person and remote attendees allowing external sources into the classroom. Our interactive whiteboards are affordable, intuitive and customizable. Teachers can now simply plug in a laptop to start lessons.

Businesses reap benefits from the easy-to-use interface and built-in Apps, that offer seamless communication and collaboration. Ideal for hybrid working, allowing multiple people to write on the same screen. Save time taking minutes and notes, you can capture annotations in real-time. Cast multiple screens wirelessly at any time and maximise collaboration.

- 75 inch for mid-size meeting rooms and classrooms
- Android embedded built-in
- Set of pre-installed applications
- Simple connectivity and usability
- Multi-touch for group activities

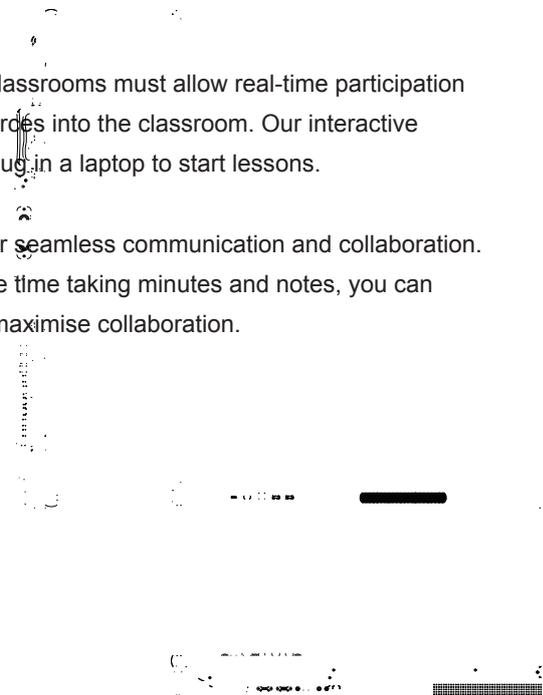

Dimensional drawings

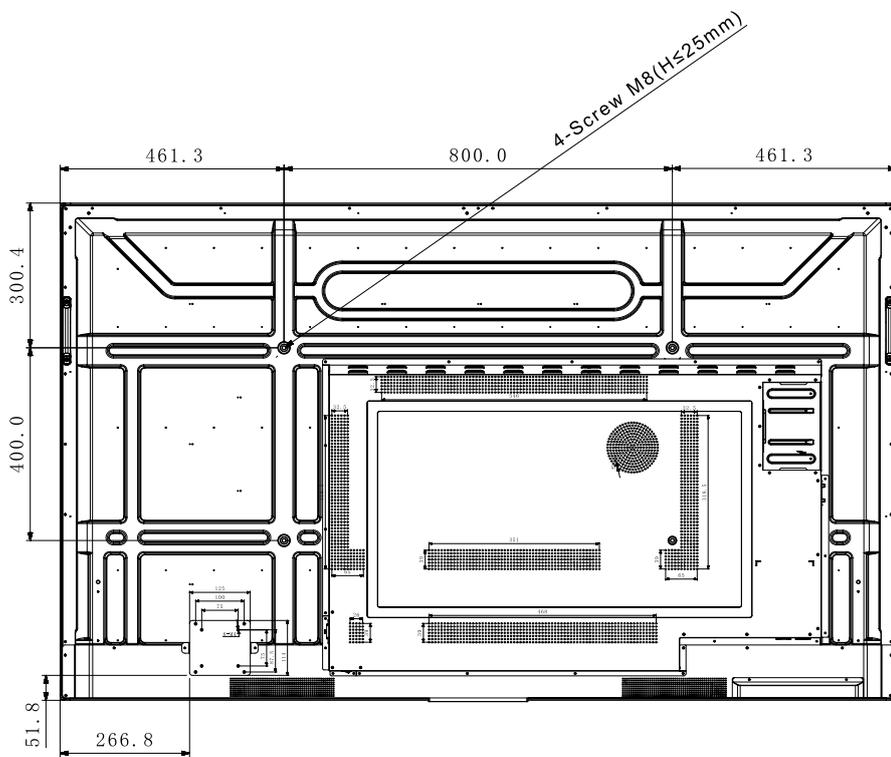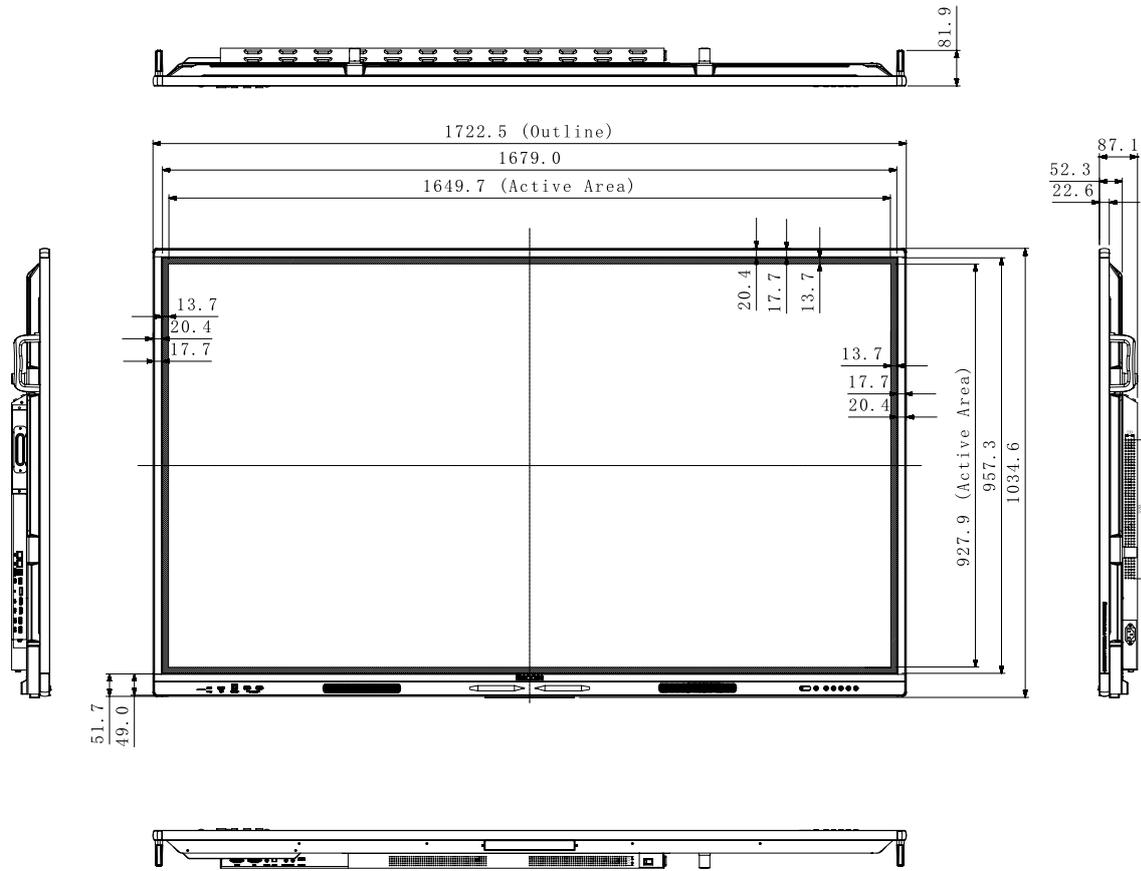

A7500

MAIN SPECIFICATIONS

GENERAL

Rear interface

HDMI IN x2	Version: HDMI2.0, Up to 3840x2160@60Hz, HDMI1 support ARC function, HDCP 1.4/2.0/2.2 compliant
DP IN x1	Version: DP1.2a, Up to 3840x2160@60Hz, HDCP 1.4/2.2 compliant
VGA IN x1	Interface: DB15, Up to 1920x1080@60Hz
Audio IN x1	Interface: Φ 3.5mm mini interface, input level (L/R): 0.2-2Vrms
LAN x2	10M/100Mbps Base-T, 100Mbps Base-TX, Support internet switch, To OPS (10M/100M/1000M), To Android (10M/100M) Interface: RJ-45
USB2.0 x1	Support images, music, video file playback, only can use this USB port to upgrade Interface: USB2.0 Type-A
USB3.0 x2	Support images, music, video file playback. Upgrade are not supported Interface: USB3.0 Type-A
Touch-USB x1	Touch interface for HDMI1/HDMI2/DP/VGA Interface: USB3.0 Type-B
MIC IN x1	Can Mix the MIC input and other input source to SPK OUT Interface: Φ 3.5mm mini interface
SPDIF x1	Max speed: 16Mbps Interface: Optical
RS232-IN x1	RS232 Input Interface: DB9
HDMI-OUT x1	Max. resolution: 3840x2160@60Hz Version: HDMI2.0, All signals can be Loop-outed by HDMI-OUT
Audio OUT x1	Output level (L/R): 10mVrms \pm 40mVrms (@500mVrms 1KHz, load 32 Ω) Interface: Φ 3.5mm mini interface (Headphone-out)

Front interface

Type-C x1	Power output: 20V/3A, Up to 3840x2160@60Hz Interface: Type-C
Public USB x2	Version: USB3.0 Interface: Type-A
Touch-USB x1	Touch interface for HDMI Interface: USB3.0 Type-B
HDMI IN x1	Version: HDMI2.0, Up to 3840x2160@60Hz, HDCP 1.4/2.0/2.2 compliant
Dimensions: W x D x H (mm)	1,723 x 88 x 1,035
Package size: W x D x H (mm)	1,900 x 225 x 1,125
Weight (kg)	51
Package weight (kg)	66
Housing material (face frame/back shell)	Aluminium/metal plate
Housing colour (face frame/back shell)	Black/black
VESA	4-M8 screw hole 800 x 400 mm

DISPLAY PANEL

Panel size: diagonal (" wide)	75
Effective area: W x H (mm)	1,649.67 x 927.94
Resolution: maximum (Full HD)	3,840 x 2,160
Colours: maximum	1,070,000,000
Brightness: maximum (cd/m ²)	400
Contrast ratio	1,200 : 1
Pixel pitch (mm)	0.4296 x 0.4296
Response Time (ms)	8
Refreshing frequency	60 Hz
Viewing angle: HV (°)	178/178
LED lifetime	50,000 hours
Colour gamut	72%

TOUCH SYSTEM

Sensing type	Infrared touch frame
Surface protection	3.2 mm toughened glass
Infrared touch	Up to 20 points
Interpolation resolution	32,768 x 32,768
Theory clicks	Unlimited
Connect type	USB2.0 Full Speed
Voltage	DC+5V +/- 5 %
Windows 10/8, Android	Multiple touch supported
Linux, Mac OS X, Chrome	Single touch supported

ELECTRICAL

OS	Android 9.0
Power requirements	AC 100V - 240V, 50/60Hz
Power consumption without OPS	Maximum brightness: 380 W 50% brightness: 260 W
Standby condition without OPS	< 0.5 W
Audio output power	2x15 W / 8 Ω
OPS power	DC 18V / 5A
RAM	4 GB
ROM (storage)	32 GB

SOFTWARE

Pre-installed app	Whiteboard, Browser, File manager, Screen share, Office document view (incl. PDF), Media Player, Cloud storage, Android app store
Default functions	Welcome screen (Launcher), Setting, Source setting, Annotation tool, Stopwatch, Clock, Calculator, Eye-protection, Spotlight, Screen capture, Calendar, Vote, Screen Recorder, Split Screen, Picture in Picture

A7500

MAIN SPECIFICATIONS

WIFI

Operating frequency	2.4 GHz / 5 Ghz
Wi-Fi standard	802.11a/b/g/n/ac

ECOLOGY

Operating temperature	0 ~ 32°C
Operating humidity	20 ~ 80%
Maximum daily operation hours (exclude stand-by time)	18 hours / day (24 hours) Maximum daily operating hours are 18hrs/day. Do not use the machine continuously / intermittently for more than 18 hours per day. Failure to do so could result in malfunction.
Storage temperature	-10 ~ 50°C
Storage humidity	15% ~ 80% RH Non-Condensing

ACCESSORIES

- Touch pen x2
- Read this first sheet
- Quick guide sheet
- Batteries AAAx2
- Remote control
- Power cord
- USB type C cable (2m)
- HDMI 2.0 cable (3m)
- USB A-B 2.0 cable (3m)
- Plastic clamp (2pcs)

OPTIONAL OPS SPECIFICATIONS

Main spec (OPS)	Chipset: SOC LAN interface (Wired): 10BASE-T/ 100BASE-TX/ 1000BASE-T LAN interface (Wireless): 802.11 ac/a/b/g/n/ax Network authentication (Wireless LAN): According to setting on system OS Encryption (Wireless LAN): According to setting on system OS Interface (Output): HDMI Interface (others): USB 3.0 Type A x 2, USB 2.0 Type A x 2, USB Type C x 1, 3.5 mm microphone jack, 3.5 mm headphone jack Bluetooth: embedded Power Source: DC +12 to 19V Not included
Capture box	
Installation	Insert into OPS slot
Product size: W x D x H (mm)	200 x 119 x 30
Product weight (kg)	1
Environmental condition	Operating temperature limits: -10 ~ 32°C Operating humidity limits: 20 ~ 80% Storage temperature limits: -10 ~ 50°C Storage humidity limits: 15 ~ 80%

RICOH
imagine. change.

www.ricoh.com.ph

RICOH (PHILIPPINES), INC.

G/F OPPEN Building, 349 Sen Gil J. Puyat, Makati City, Philippines 1200
Hotline: [Makati] (02) 8865-9500, [Laguna] (049) 502-7243, [Cebu] (032) 256-4559



Ricoh Interactive Whiteboard

A8600 Datasheet

- ✓ Interactive learning
- ✓ Remote collaboration
- ✓ Webinars
- ✓ Hybrid meetings



Powerful collaboration at your fingertips



Ricoh's high-quality interactive whiteboard A8600 encourages innovative collaboration anytime, anywhere, and with anyone. You can use it to enable ideas to be shared right away and reduce work to produce meeting minutes, helping to maximize team performance. At the same time the A8600 is affordable, intuitive and customizable, perfect for the new normal, hybrid classrooms.

In education remote learning and collaboration are the new normal, where hybrid classrooms must allow real-time participation and information sharing with in-person and remote attendees allowing external sources into the classroom. Our interactive whiteboards are affordable, intuitive and customizable. Teachers can now simply plug in a laptop to start lessons.

Businesses reap benefits from the easy-to-use interface and built-in Apps, that offer seamless communication and collaboration. Ideal for hybrid working, allowing multiple people to write on the same screen. Save time taking minutes and notes, you can capture annotations in real-time. Cast multiple screens wirelessly at any time and maximise collaboration.

- 86 inch for larger conference rooms and higher education lecture halls
- Real-time information sharing
- Customizable home screen for easy access to frequently used functions
- Versatile connectivity with front-facing interfaces
- 4K UHD display and powerful audio

Dimensional drawings

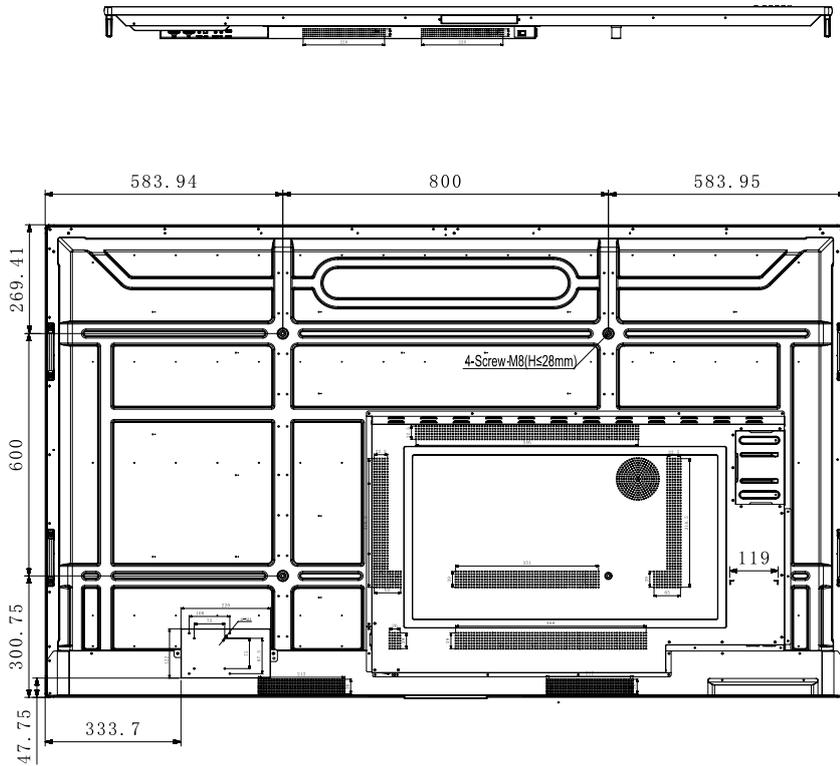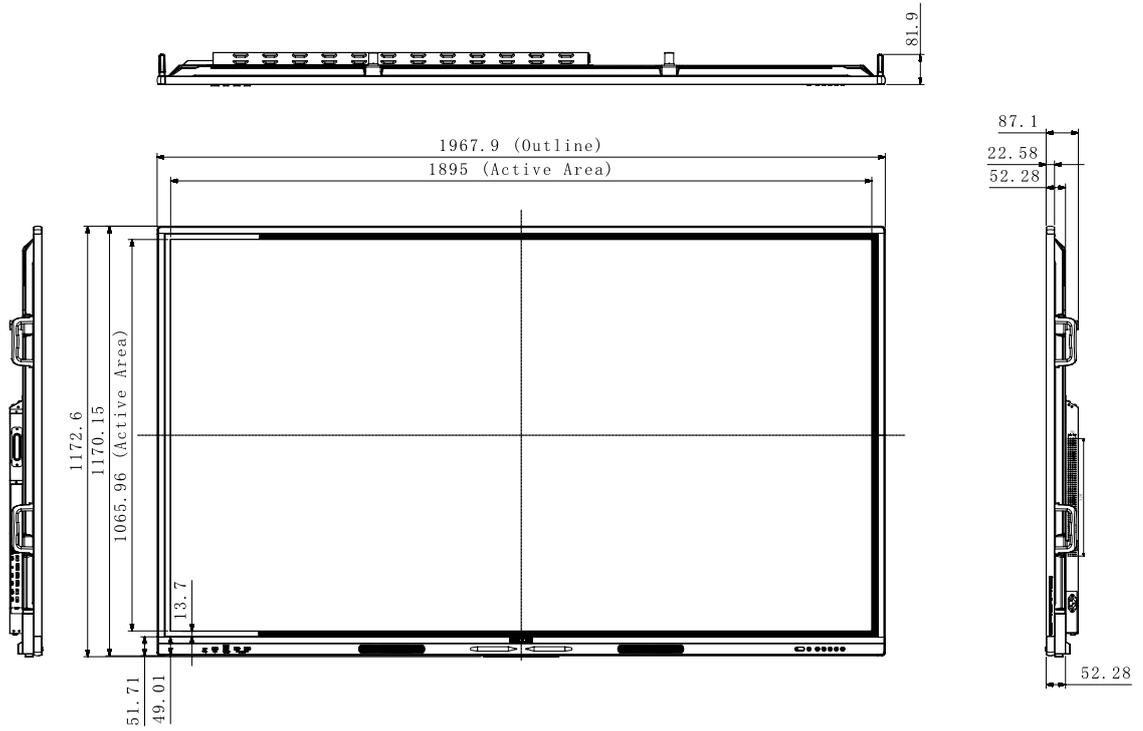

A8600

MAIN SPECIFICATIONS

GENERAL

Rear interface

HDMI IN x2	Version: HDMI2.0, Up to 3840x2160@60Hz, HDMI1 support ARC function, HDCP 1.4/2.0/2.2 compliant
DP IN x1	Version: DP1.2a, Up to 3840x2160@60Hz, HDCP 1.4/2.2 compliant
VGA IN x1	Interface: DB15, Up to 1920x1080@60Hz
Audio IN x1	Interface: Φ 3.5mm mini interface, input level (L/R): 0.2-2Vrms
LAN x2	10M/100Mbps Base-T, 100Mbps Base-TX, Support internet switch, To OPS (10M/100M/1000M), To Android (10M/100M) Interface: RJ-45
USB2.0 x1	Support images, music, video file playback, only can use this USB port to upgrade Interface: USB2.0 Type-A
USB3.0 x2	Support images, music, video file playback. Upgrade are not supported Interface: USB3.0 Type-A
Touch-USB x1	Touch interface for HDMI1/HDMI2/DP/VGA Interface: USB3.0 Type-B
MIC IN x1	Can Mix the MIC input and other input source to SPK OUT Interface: Φ 3.5mm mini interface
SPDIF x1	Max speed: 16Mbps Interface: Optical
RS232-IN x1	RS232 Input Interface: DB9
HDMI-OUT x1	Max. resolution: 3840x2160@60Hz Version: HDMI2.0, All signals can be Loop-outed by HDMI-OUT
Audio OUT x1	Output level (L/R): 10mVrms \pm 40mVrms (@500mVrms 1KHz, load 32 Ω) Interface: Φ 3.5mm mini interface (Headphone-out)

Front interface

Type-C x1	Power output: 20V/3A, Up to 3840x2160@60Hz Interface: Type-C
Public USB x2	Version: USB3.0 Interface: Type-A
Touch-USB x1	Touch interface for HDMI Interface: USB3.0 Type-B
HDMI IN x1	Version: HDMI2.0, Up to 3840x2160@60Hz, HDCP 1.4/2.0/2.2 compliant
Dimensions: W x D x H (mm)	1,968 x 88 x 1,173
Package size: W x D x H (mm)	2,160 x 225 x 1,310
Weight (kg)	73
Package weight (kg)	82
Housing material (face frame/back shell)	Aluminium/metal plate
Housing colour (face frame/back shell)	Black/black
VESA	4-M8 screw hole 600 x 600 mm

DISPLAY PANEL

Panel size: diagonal (" wide)	86
Effective area: W x H (mm)	1,895.04 x 1,065.96
Resolution: maximum (Full HD)	3,840 x 2,160
Colours: maximum	1,070,000,000
Brightness: maximum (cd/m ²)	400
Contrast ratio	1,200 : 1
Pixel pitch (mm)	0.4935 x 0.4935
Response Time (ms)	8
Refreshing frequency	60 Hz
Viewing angle: HV (°)	178/178
LED lifetime	50,000 hours
Colour gamut	72%

TOUCH SYSTEM

Sensing type	Infrared touch frame
Surface protection	3.2 mm toughened glass
Infrared touch	Up to 20 points
Interpolation resolution	32,768 x 32,768
Theory clicks	Unlimited
Connect type	USB2.0 Full Speed
Voltage	DC+5V +/- 5 %
Windows 10/8, Android	Multiple touch supported
Linux, Mac OS X, Chrome	Single touch supported

ELECTRICAL

OS	Android 9.0
Power requirements	AC 100V - 240V, 50/60Hz
Power consumption without OPS	Maximum brightness: 460 W 50% brightness: 340 W
Standby condition without OPS	< 0.5 W
Audio output power	2x15 W / 8 Ω
OPS power	DC 18V / 5A
RAM	4 GB
ROM (storage)	32 GB

SOFTWARE

Pre-installed app	Whiteboard, Browser, File manager, Screen share, Office document view (incl. PDF), Media Player, Cloud storage, Android app store
Default functions	Welcome screen (Launcher), Setting, Source setting, Annotation tool, Stopwatch, Clock, Calculator, Eye-protection, Spotlight, Screen capture, Calendar, Vote, Screen Recorder, Split Screen, Picture in Picture

A8600

MAIN SPECIFICATIONS

WIFI

Operating frequency	2.4 GHz / 5 Ghz
Wi-Fi standard	802.11a/b/g/n/ac

ECOLOGY

Operating temperature	0 ~ 32°C
Operating humidity	20 ~ 80%
Maximum daily operation hours (exclude stand-by time)	18 hours / day (24 hours) Maximum daily operating hours are 18hrs/day. Do not use the machine continuously / intermittently for more than 18 hours per day. Failure to do so could result in malfunction.
Storage temperature	-10 ~ 50°C
Storage humidity	15% ~ 80% RH Non-Condensing

ACCESSORIES

- Touch pen x2
- Read this first sheet
- Quick guide sheet
- Batteries AAAx2
- Remote control
- Power cord
- USB type C cable (2m)
- HDMI 2.0 cable (3m)
- USB A-B 2.0 cable (3m)
- Plastic clamp (2pcs)

OPTIONAL OPS SPECIFICATIONS

Main spec (OPS)	Chipset: SOC LAN interface (Wired): 10BASE-T/ 100BASE-TX/ 1000BASE-T LAN interface (Wireless): 802.11 ac/a/b/g/n/ax Network authentication (Wireless LAN): According to setting on system OS Encryption (Wireless LAN): According to setting on system OS Interface (Output): HDMI Interface (others): USB 3.0 Type A x 2, USB 2.0 Type A x 2, USB Type C x 1, 3.5 mm microphone jack, 3.5 mm headphone jack Bluetooth: embedded Power Source: DC +12 to 19V Not included
Capture box	Not included
Installation	Insert into OPS slot
Product size: W x D x H (mm)	200 x 119 x 30
Product weight (kg)	1
Environmental condition	Operating temperature limits: -10 ~ 32°C Operating humidity limits: 20 ~ 80% Storage temperature limits: -10 ~ 50°C Storage humidity limits: 15 ~ 80%

RICOH
imagine. change.

www.ricoh.com.ph

RICOH (PHILIPPINES), INC.

G/F OPPEN Building, 349 Sen Gil J. Puyat, Makati City, Philippines 1200
Hotline: [Makati] (02) 8865-9500, [Laguna] (049) 502-7243, [Cebu] (032) 256-4559

